

TEMPORARY FLOATING STORAGE TANK – KFB-25 - 50m³




- **Robust pillow tank with high abrasion, tear and puncture resistance.**
- **Ends may be opened for cleaning**
- **Chloroprene rubber outer cover**
- **Sizes from 5 to 50 m³**
- **Lies flat when empty.**
- **May be stored on a hydraulic winder**

The KFB-range of floating rubber tanks is designed for operation under harsh conditions and for all types of oils recovered in an oil spill response operation.

The floating tank is constructed of two plies heavy-duty polyester fabric and it is covered by a layer of oil resistant chloroprene rubber for protection against abrasion and rough handling

Filling and emptying of the tank take place through any of the two 3", 4" or 5" inch flanges – one each end

The KFB tank system includes towing equipment, an inflatable front buoyancy chamber to prevent the tank from diving during towing, double centre-float, tank fittings with hoses and a small petrol driven air blower.

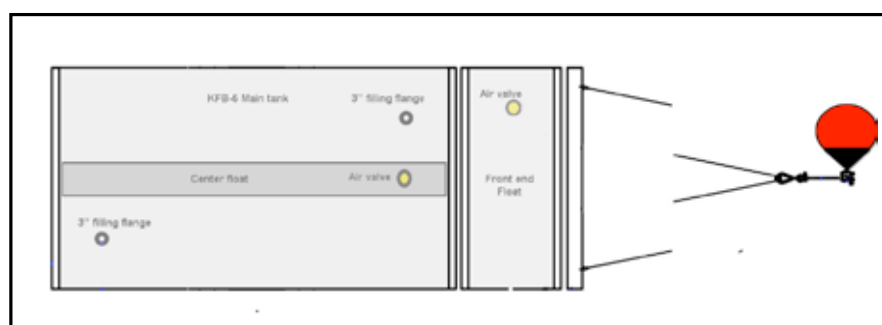

TECHNICAL DATA

Type	KFB - 25	KFB - 50
Capacity	25,000 litre	50,000 litre
Hose connection	2 x 3", 4" or 5" BSP flange	
Deflated size	9.8 x 3.1 m	18.2 x 3.1 m
Storage size (box)	3.1 x 0.6 x 0.6 m	3.1 x 0.6 x 0.8 m
Winder size	KHW-35	KHW-35
Packed weight	270 kg	470 kg

Buoyancy: A front pillow with approx. 800 litres and two centre floats with 900 litres total buoyancy. Both are inflated by low-pressure air through a Monsun air valve. Air blower is included

Construction: The tank is constructed as a rubber tube that is hot vulcanized in a Rotocure vulcanizing press
End connectors and tow bar are of the ASTM slide type made of marine grade aluminium

Packing: Packed in an aluminium box with front (fold down) opening



EEXII-Manufacturing, Sdn, Bhd
 No. 32 Jalan Bagan Nira, 26/8,
 Hicom Industrial Park, Section 26, 40000 Shah Alam
 Tel: 603-5192 2913 Fax: 603-5192 9913
 Email : sales@eexii-manufacturing.com